


## SI701 S SERIES-7" Indoor Monitor


### Key Characteristics

#### Basic Function

- 7" capacitive touch screen
- Support custom wallpaper and screensaver
- Multi - indoor monitor in one apartment
- Voice message, blacklist, whitelist feature
- RS485 for smart home setting
- 7 defense zone alarm input
- RTSP for IP camera setting
- Easy configuration with APP by scanning QR Code

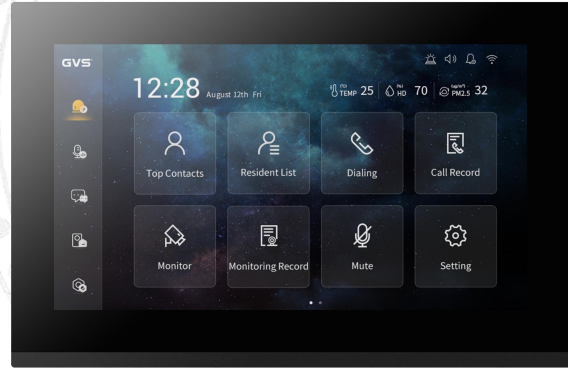

### Typical Topology

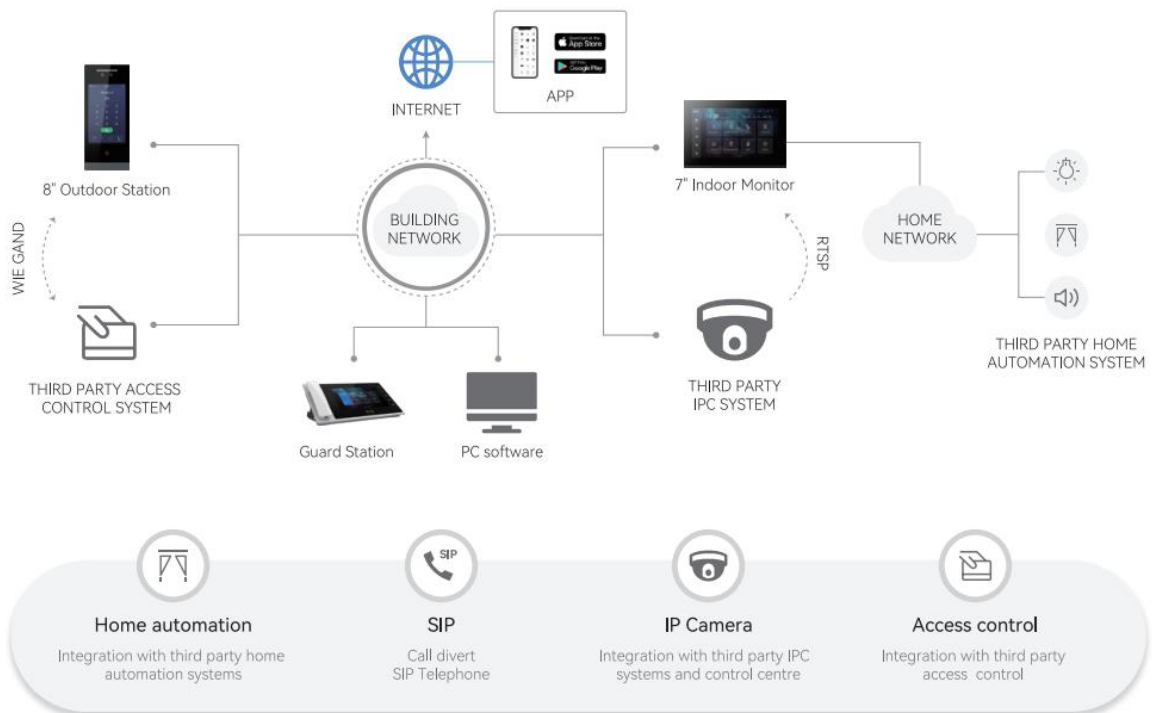

## Parameters

Model	Model Number	SI701
System Parameters	Processor	High-Performance Embedded SOC Processor
	Operation system	Embedded Linux Operation System
Display Parameters	Display screen	7-inch Colored TFT LCD
	Display resolution	1024 × 600
	Operation method	Capacitive Touch Screen
	Operation interface	Delicate Flattened UI Operation Interface
Audio Parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio compression standard	G.711 A
	Audio <u>sample rate</u>	<a href="#">16K 16 Bit</a>
	Audio quality	Noise Elimination and Echo Cancellation
Network Parameters	Ethernet	10/100 Mbps Self-Adaptive Ethernet
	Network protocol	TCP/IP, UDP, <a href="#">SIP</a> , <a href="#">HTTP</a> , <a href="#">HTTPS</a> , <a href="#">FTP</a> , <a href="#">RTSP</a> , <a href="#">RTP</a>
Alarm Parameters	Alarm input	7-channel Defense Zone Alarm Inputs
Device Interfaces	Network interface	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
	RS-485	1 RS-485 Half-Duplex Port
	I/O output	Unlock button
General	Memory	<a href="#">50</a> Photos
	Power supply	48V Power Over Ethernet
		DC 24V
	Power consumption	<a href="#">&lt;7W 24V 300mA</a>
	Working temperature	-10° C to + 45° C
	Working humidity	10% to 90%
	Dimensions (L × W × H)	182 mm × 119 mm × 15 mm
Certification	CE, ROHS	

## Appearance and Interfaces

